

## ROSEMOUNT 8750W MAGNETIC FLOWMETER



Rosemount reliability for utility applications

**ROSEMOUNT**

  
**EMERSON**  
Process Management

# ACHIEVE RELIABLE UTILITY MEASUREMENTS

Performance, reliability and intelligent diagnostics come together to make Rosemount Magnetic Flowmeters the superior solution for utility flow measurement.

Rosemount has used its engineering expertise in magnetic flowmeters to design a solution specifically for utility flow measurement. The easy-to-use robust design provides the reliability and accuracy you need to keep your process running.




ROSEMOUNT 8750W MAGNETIC FLOWMETER

## Reliable, Robust Design


- ✓ Fully welded construction withstands sustained vibration
- ✓ Dual-compartment transmitter housing keeps electronics isolated from moisture and contamination
- ✓ Robust design and materials make the 8750W the most reliable meter available for utility flow application

## 8750W LONG-LASTING, ROBUST SOLUTION

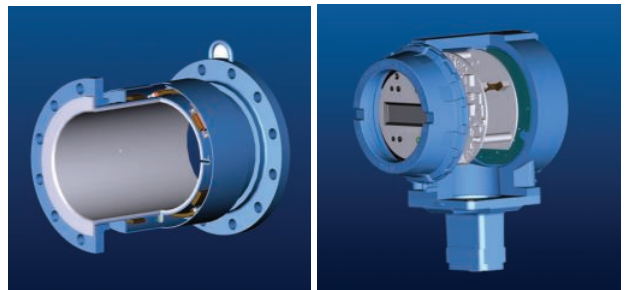

Fully welded design

Isolated electronics

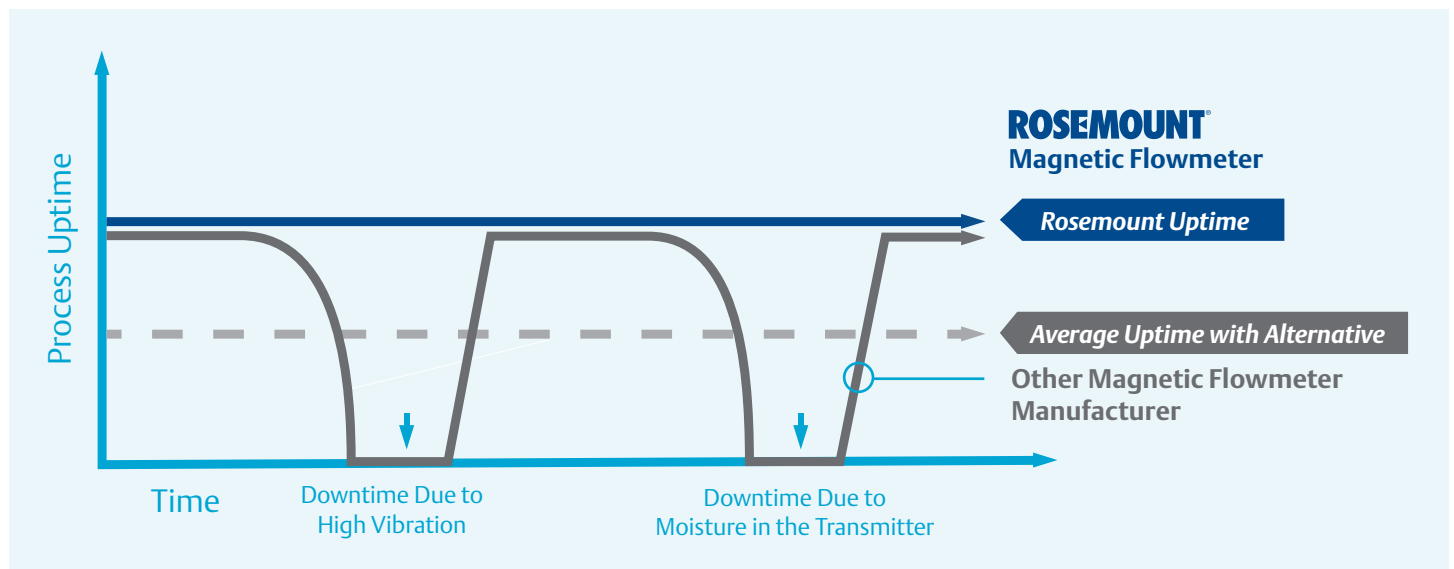

## Avoid Unplanned Shutdowns

- ✓ Continuous meter verification confirms meter calibration without interrupting the process
- ✓ Electrode coating diagnostic indicates when preventive maintenance is needed so unexpected downtime is avoided
- ✓ High process noise diagnostic provides accurate readings to reduce process variability
- ✓ Printed report verifies meter performance for regulatory agencies



Report feature verifies the meter is performing as well as the day it left the factory



“Leveraging the **world-class** smart meter verification and process diagnostics, we significantly **reduced operator rounds** and have more **accurate and reliable reporting** now.”

*Utility Manager, Major Chemical facility*



WALL MOUNT TRANSMITTER WITH KEYBOARD

## Easy to Use

- ✓ Easiest-to-use Local Operator Interface
- ✓ Simplified configuration at the meter
- ✓ Fully tested and ready to install



CLEAN WATER    WASTE WATER    UTILITY FLOW



## Specifications

Line Size	0.5" – 48" (15 mm – 1200 mm)
Liner Material	PTFE, Neoprene
Electrode Material	Stainless Steel, Nickel Alloy
Flange Standard	ANSI, EN, GB, AS4087, AS2129, JIS, AWWA
Flange Rating	Up to 300# / PN40 / 4.0Mpa / PN35 / Table E / 10K / Class D
Accuracy	Standard 0.5%; Optional High Accuracy 0.25%
Mounting	Integral / Remote / Wall Mount
Transmitter Output	4-20 mA Digital Electronics (HART Protocol)
Power Supply	AC (90-250 V AC, 50–60 Hz); DC (12–42 V DC)
Hazardous Area Approval	Ordinary Location, NEPSI Zone 2
Process Diagnostics	Empty Pipe, Grounding/Wiring Detection, High Process Noise, Coated Electrode Detection
SMART™ Meter Verification	Meter Integrity

## Rosemount 8750W Magnetic Flowmeter



The Emerson logo is a trade mark and service mark of Emerson Electric Co.  
Rosemount and the Rosemount logotype are registered trademarks of Rosemount Inc.  
All other marks are the property of their respective owners.

### Emerson Process Management Rosemount Inc.

8200 Market Boulevard  
Chanhassen, MN 55317 USA  
www.rosemount.com  
T (USA) +1 800 522 6277  
T (International) +1 (303) 527 5200  
F +1 (303) 530 8459

### Emerson FZE

P.O. Box 17033  
Jebel Ali Free Zone  
Dubai UAE  
T +971 4 811 8100  
F +971 4 886 5465  
FlowCustomerCare.MEA@Emerson.com

### Emerson Process Management Flow B.V.

Neonstraat 1  
6718 WX Ede  
The Netherlands  
T +31 (0) 318 495555  
F +31 (0) 318 495556

### Emerson Process Management Latin America

Multipark Office Center  
Turrubares Building, 3rd & 4th floor  
Guachipelin de Escazu, Costa Rica  
T+(506) 2505-6962  
international.mmicam@emersonprocess.com

### Emerson Process Management Asia Pacific

Private Limited  
1 Pandan Crescent  
Singapore 128461  
T (65) 6777 8211  
F (65) 6777 0947  
Enquiries@AP.EmersonProcess.com

**ROSEMOUNT**®

For more information:  
www.rosemount.com

  
**EMERSON**™  
Process Management