
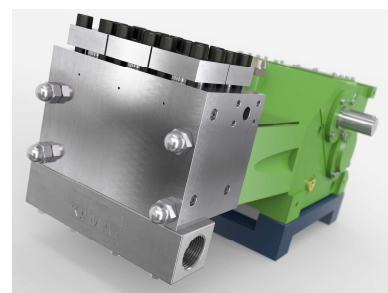


Трехплунжерный насос К 8000 – 3G Triplex Plunger Pump

P 5-1ru

07.12.2015

- данные о производительности- при объёмном коэффициенте полезного действия 100% и при температуре окружающей среды 20°C
- минимальный предварительный напор - в зависимости от вида рабочей жидкости
- диапазон регулировки частоты вращения 10-100% в зависимости от нагрузки на штангу
- динамически сбалансированный редуктор со смазкой погружением
- стандартное передаточное число редуктора $i = 2,75 - 3,22 - 3,68$
- возможна поставка также согласно стандарту API 674
- специальные рабочие жидкости, такие как морская вода, гликоль, метанол, масла и т.п. -по запросу

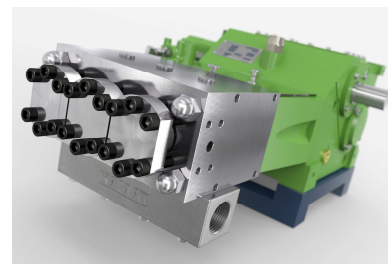

- Flow rate is based on 100% volumetric efficiency and 20°C ambient temperature
- min. inlet pressure depending on fluid medium
- Speed range 10-100% depending on rod force
- Gear dynamically balanced
- Gear with splash lubrication
- Standard gear ratios $i = 2,75 - 3,22 - 3,68$
- Also available to API 674
- Special medium such as sea water, glycol, methanol, oils, etc. on request

$n_{nom} = 530 \text{ 1/min}$		p max. bar @ kW				Тип головки / Head type		
Тип/ Type	l/min	45 kW	55 kW	60 kW	75 kW	A	M	MC
K 8012 – 3G	13	1770	2160	2360	2950	1		
K 8014 – 3G	18	1280	1590	1730	2150	1		
K 8016 – 3G	24	980	1220	1330	1660	1		
K 8018 – 3G	30	800	965	1050	1300	1		
K 8020 – 3G	37	660	800	870	1065	1		H
K 8022 – 3G	45	545	665	725	890	1		H
K 8024 – 3G	54	460	555	605	755	1		H
K 8026 – 3G	63	390	475	515	645	1		H
K 8028 – 3G	73	335	410	445	555	1		H
K 8030 – 3G	84	280	345	375	470	1	1	H
K 8032 – 3G	96	245	300	330	410	1	1	1
K 8036 – 3G	121	190	235	255	320		1	1
K 8040 – 3G	150	155	190	205	255		1	1
K 8045 – 3G	190	120	150	160	200			1
K 8050 – 3G	234	100	120	130	165			1
K 8055 – 3G	283	80	100	110	135			1

API 674 = max. 400 1/min

= Ultra High Pressure UHP / сверхвысокое давление


Размерный чертеж К 8000 – 3G

Dimension drawing

~ 250 kg

P 5-2ru

01.05.2017

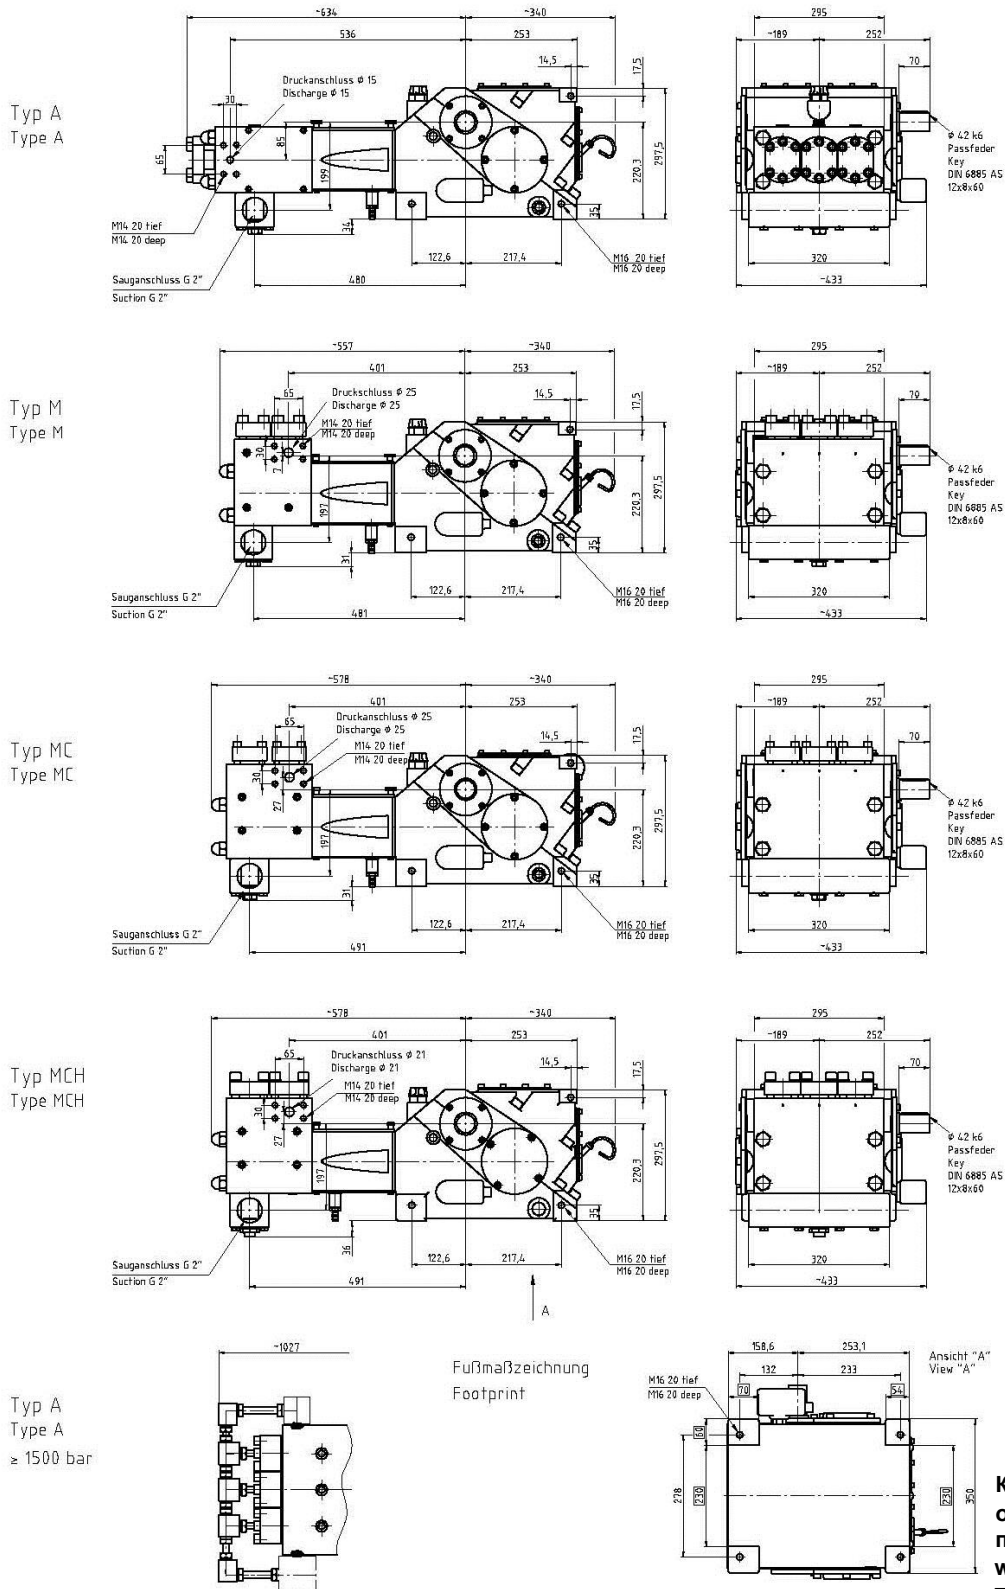

Компания ПромХимТех
официальный дистрибьютор
плунжерных насосов
www.promhimtech.ru
Тел. 8 800 250-01-54
e-mail: zakaz@promhimtech.ru